Department of
Transportation &
Environmental Services

Thank you for joining.
The meeting will start at 6 p.m.

N. Beauregard Street Multi-Use Trail Project

Pre-Construction Community Meeting


Zoom Webinar

Thursday, October 22, 2026

Agenda

- Project Location
- Project Overview
- Key Improvements
- Construction Impacts
- Project Schedule
- Closing Summary
- Questions

Project Location

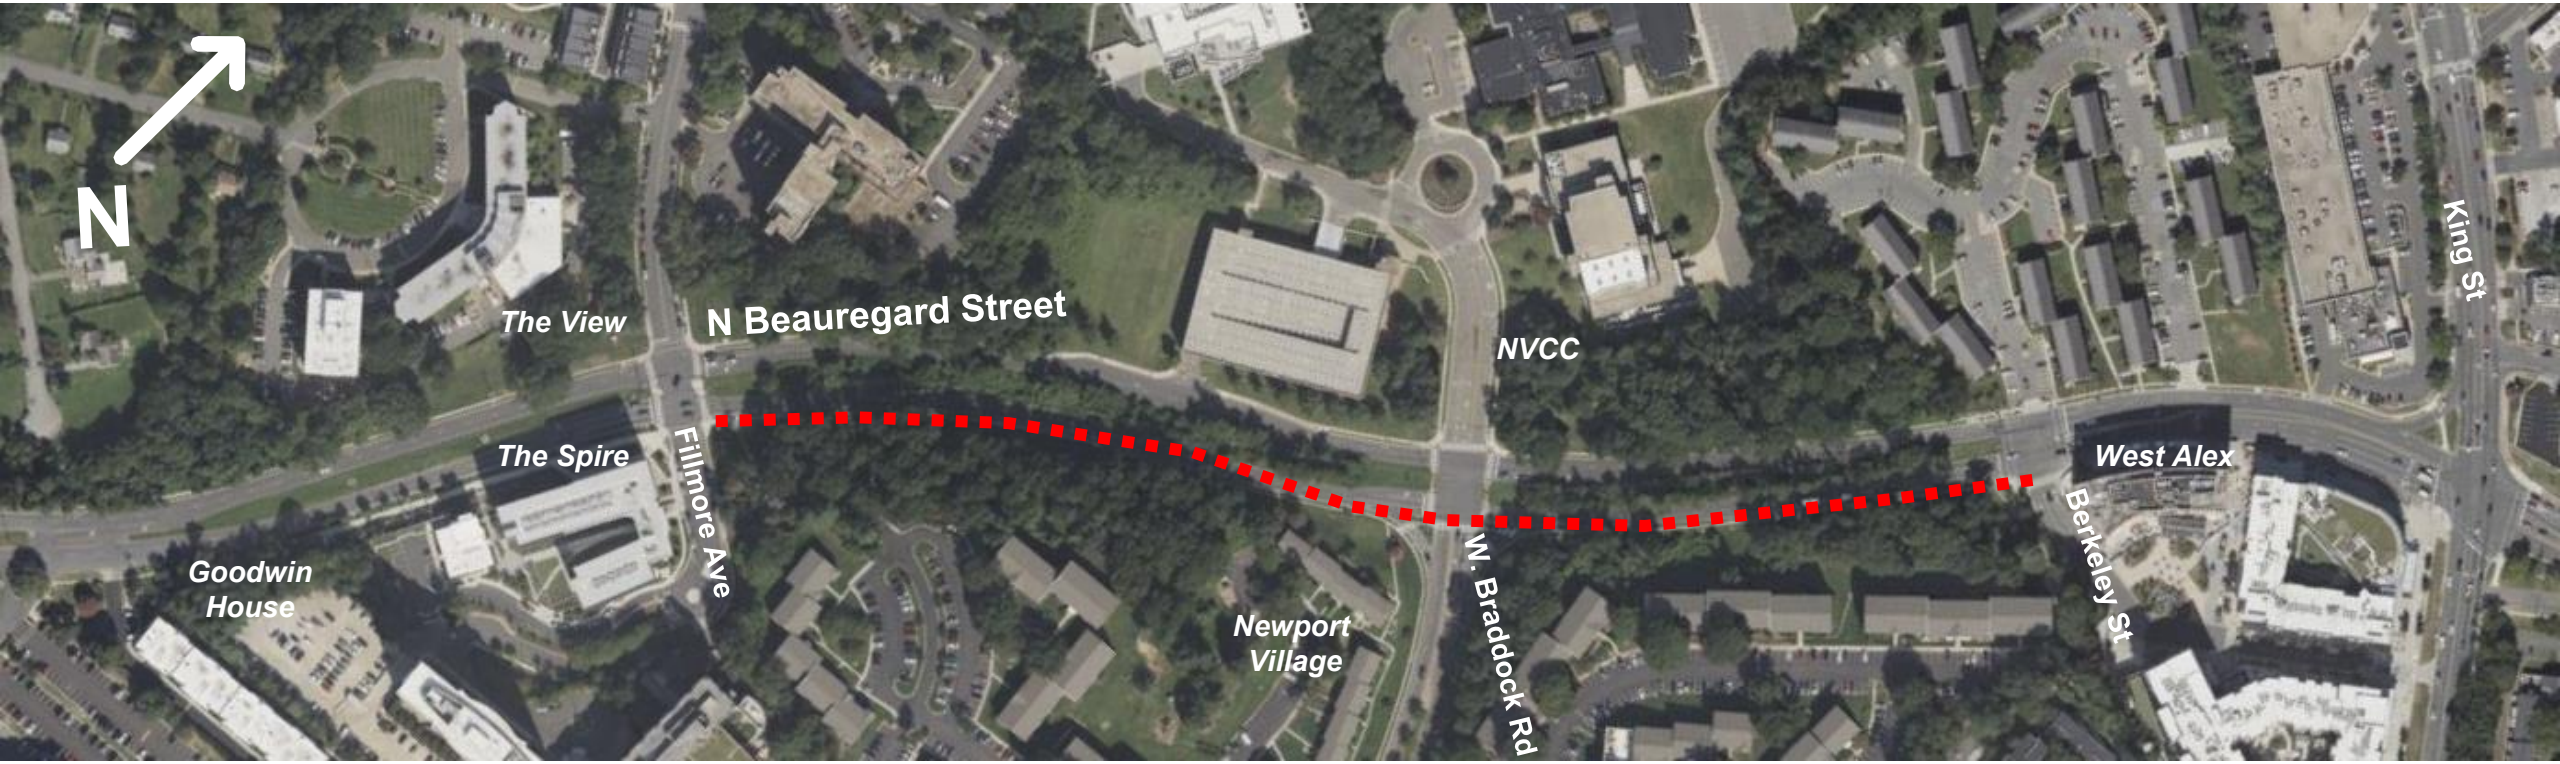

- North Beauregard Street between Fillmore Avenue and Berkeley Street

Project Overview



Purpose: Increase mobility and access on the West End, connect neighborhoods, and complete gaps in the city's bicycle network.



Scope of Work: Replace 4-foot sidewalk with 10-foot multi-use trail and retaining walls.



Funding Source: CMAQ/RSTP funding administered by Virginia Department of Transportation



Construction Contractor: Milani Construction LLC

Proposed Trail Design




EXISTING CONDITION
VIEW TRAVELLING NORTHEAST ON NORTH BEAUREGARD STREET




PROPOSED CONDITION
VIEW TRAVELLING NORTHEAST ON NORTH BEAUREGARD STREET

Design By Segment: Fillmore Ave to W Braddock Rd

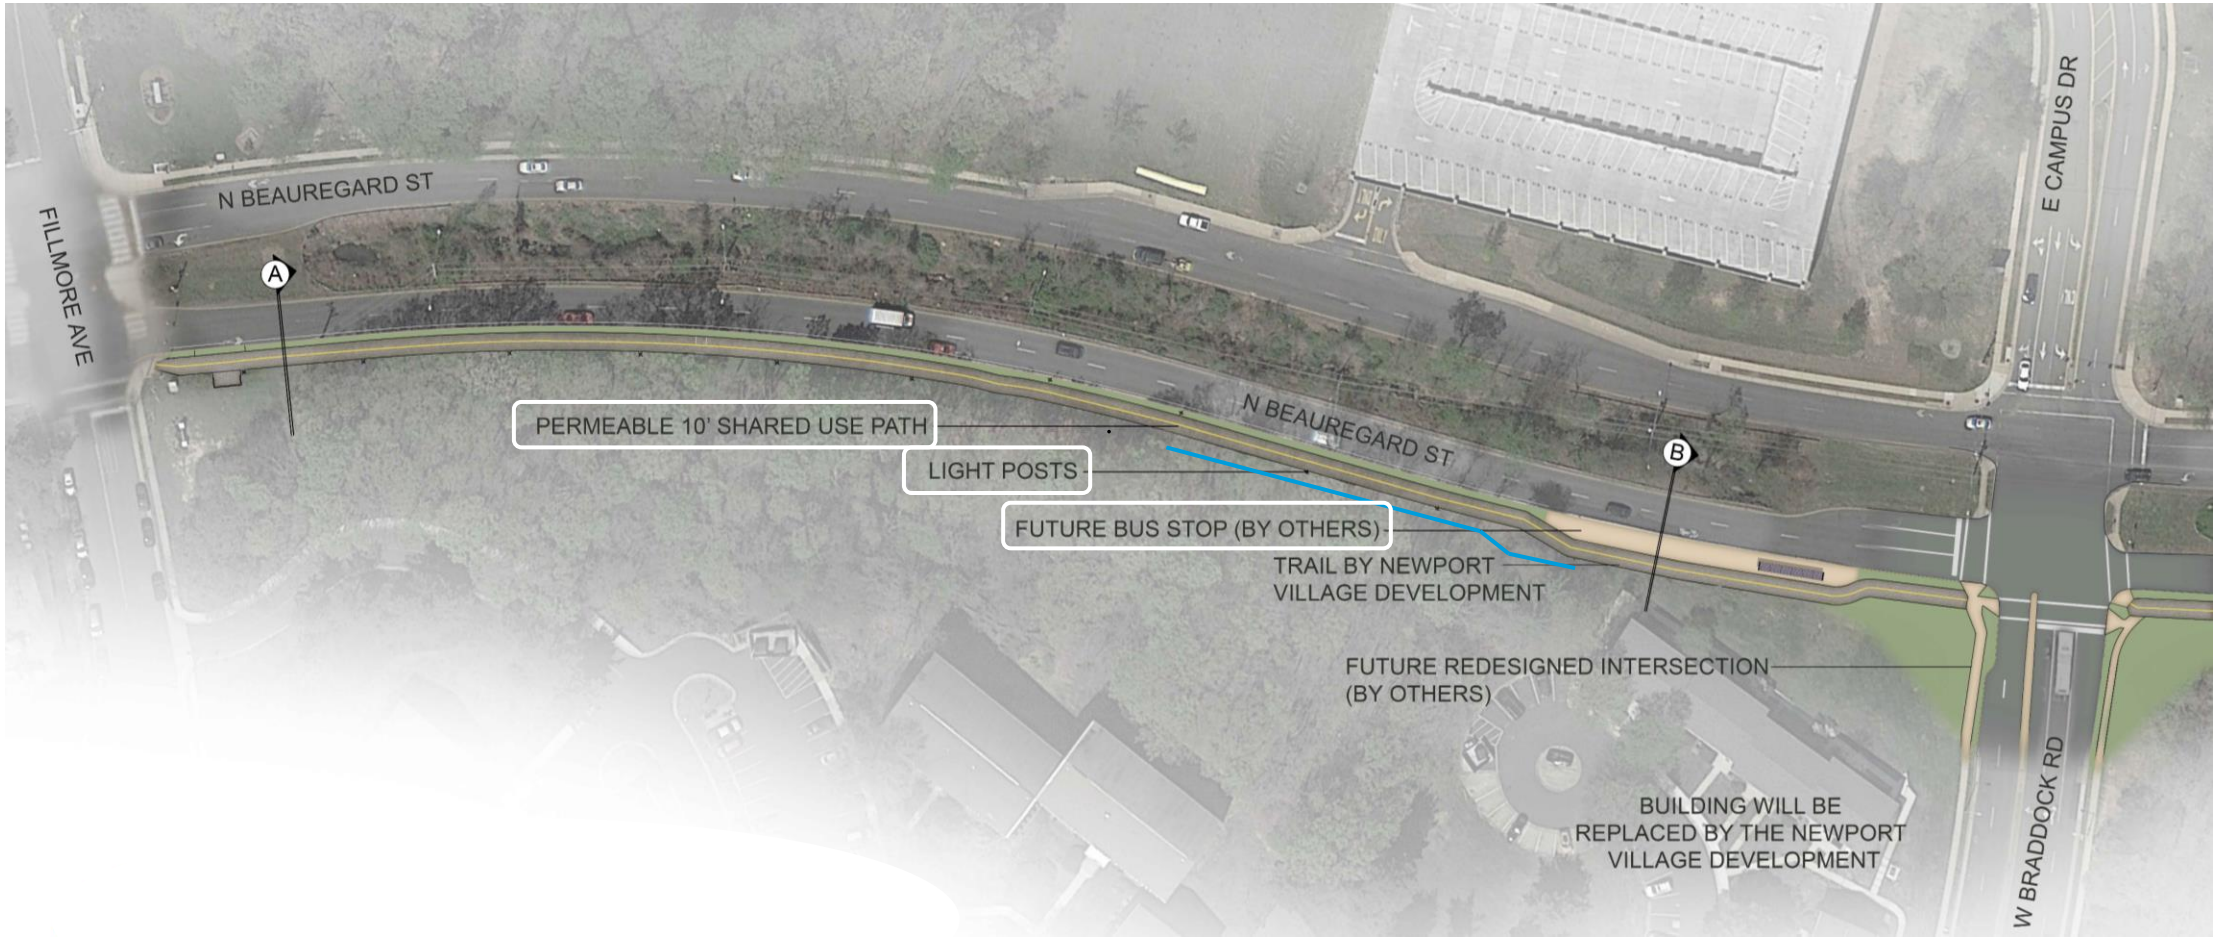


Typical Section: Fillmore Ave to W Braddock Rd

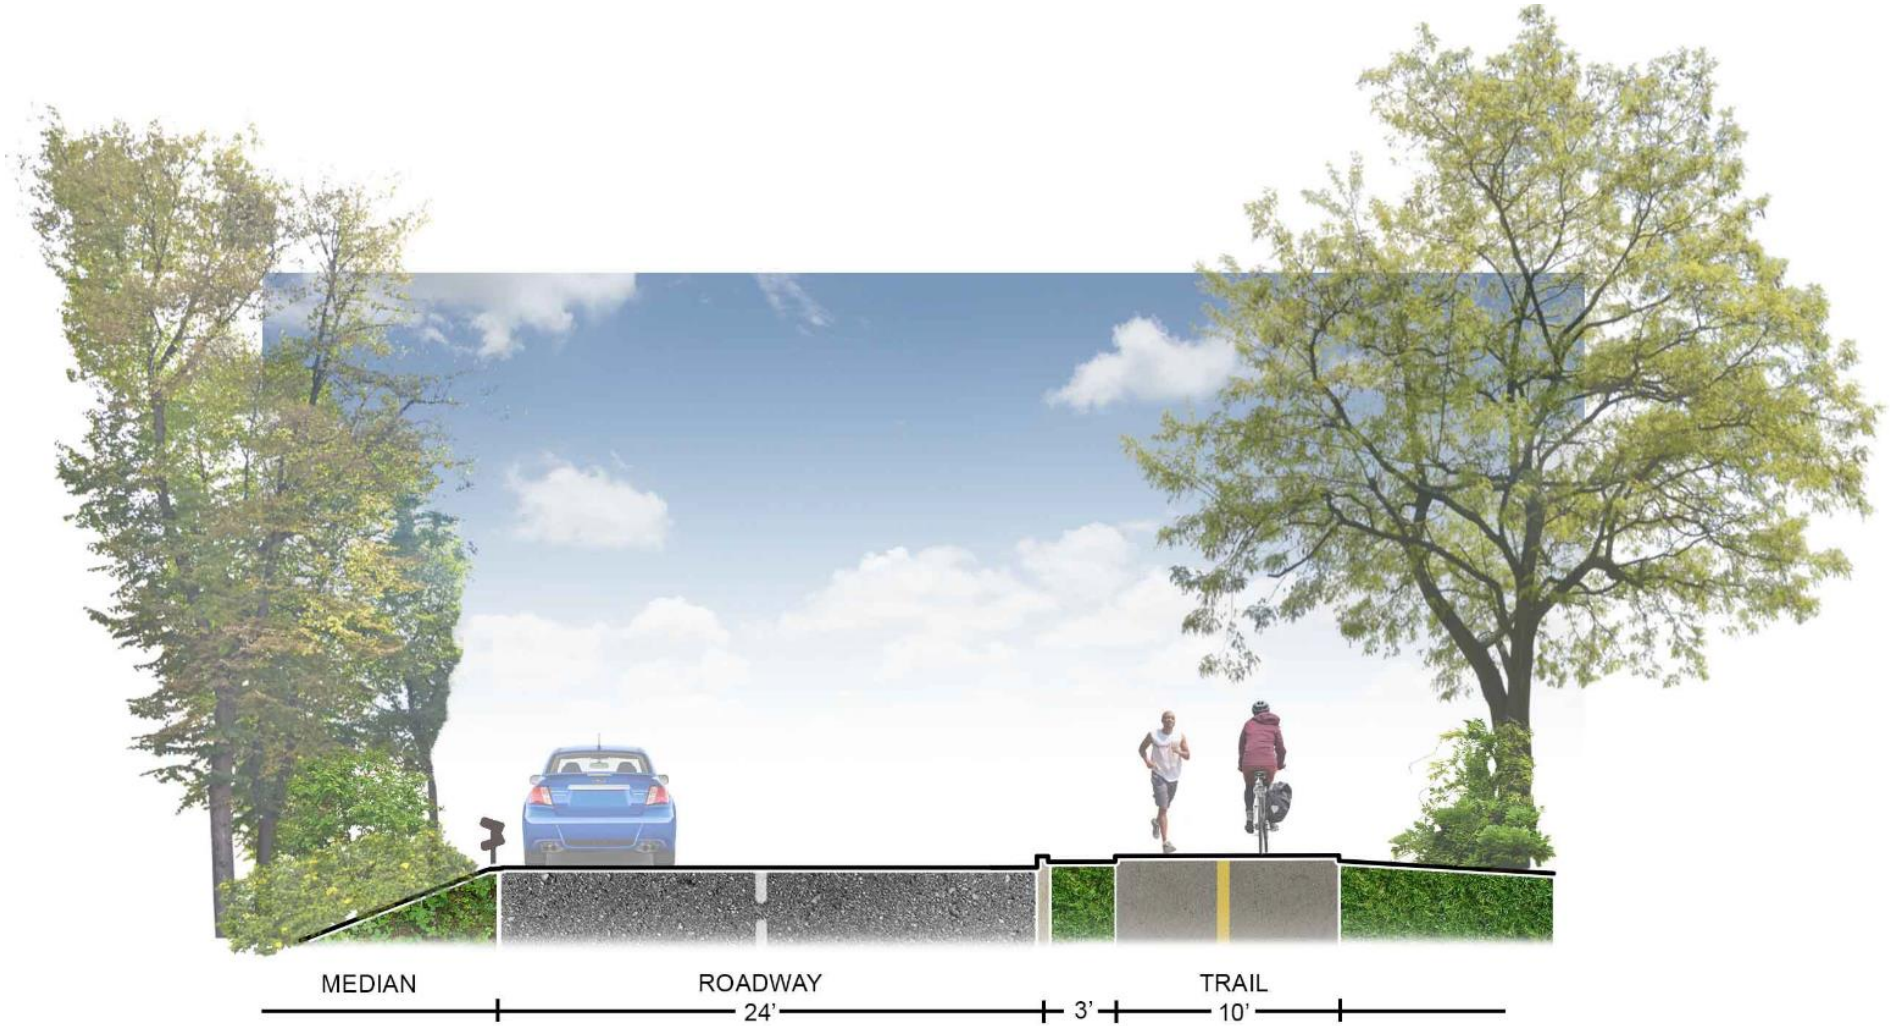


SECTION A

Typical Section: Fillmore Ave to W Braddock Rd

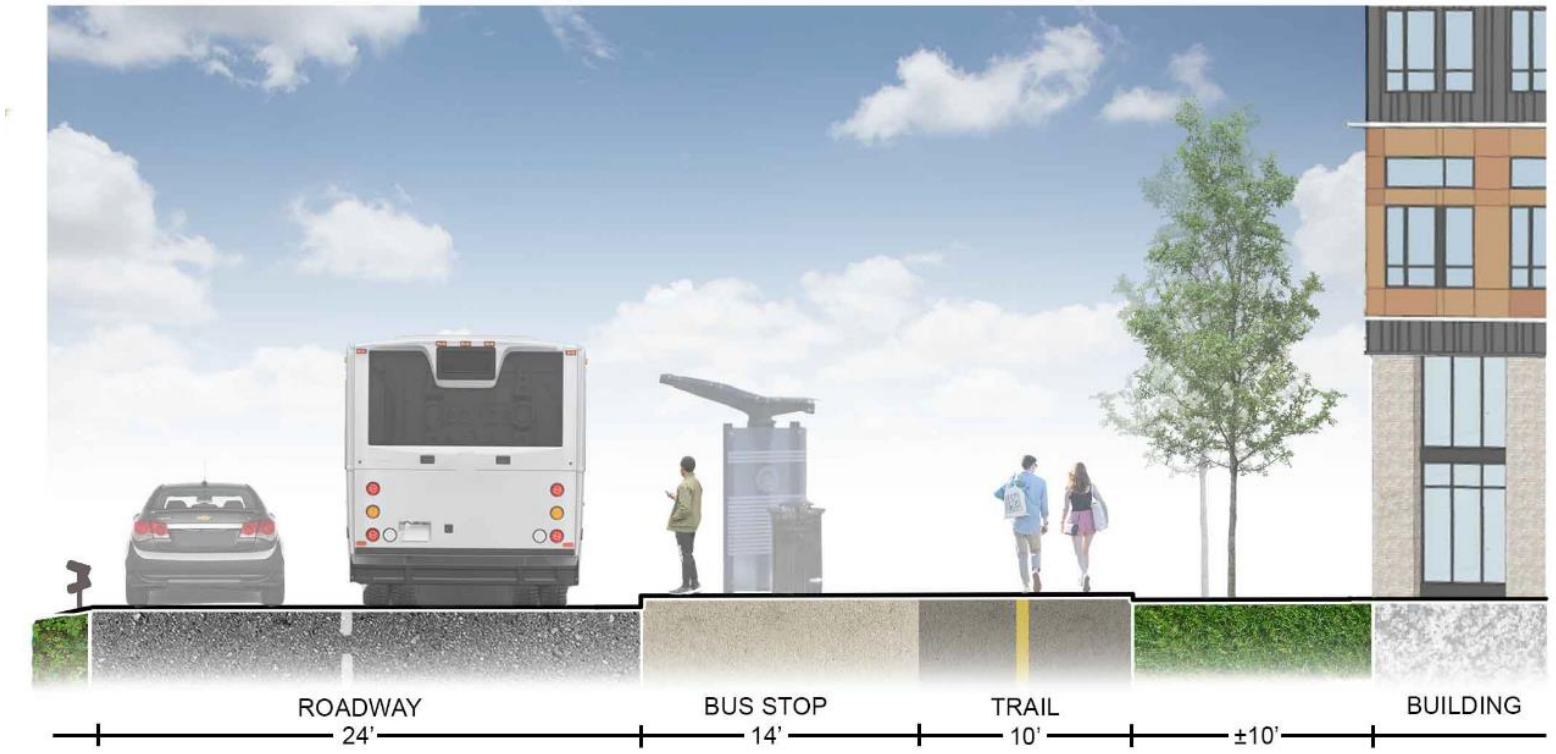


SECTION B

Design By Segment: W Braddock Rd to Berkeley St

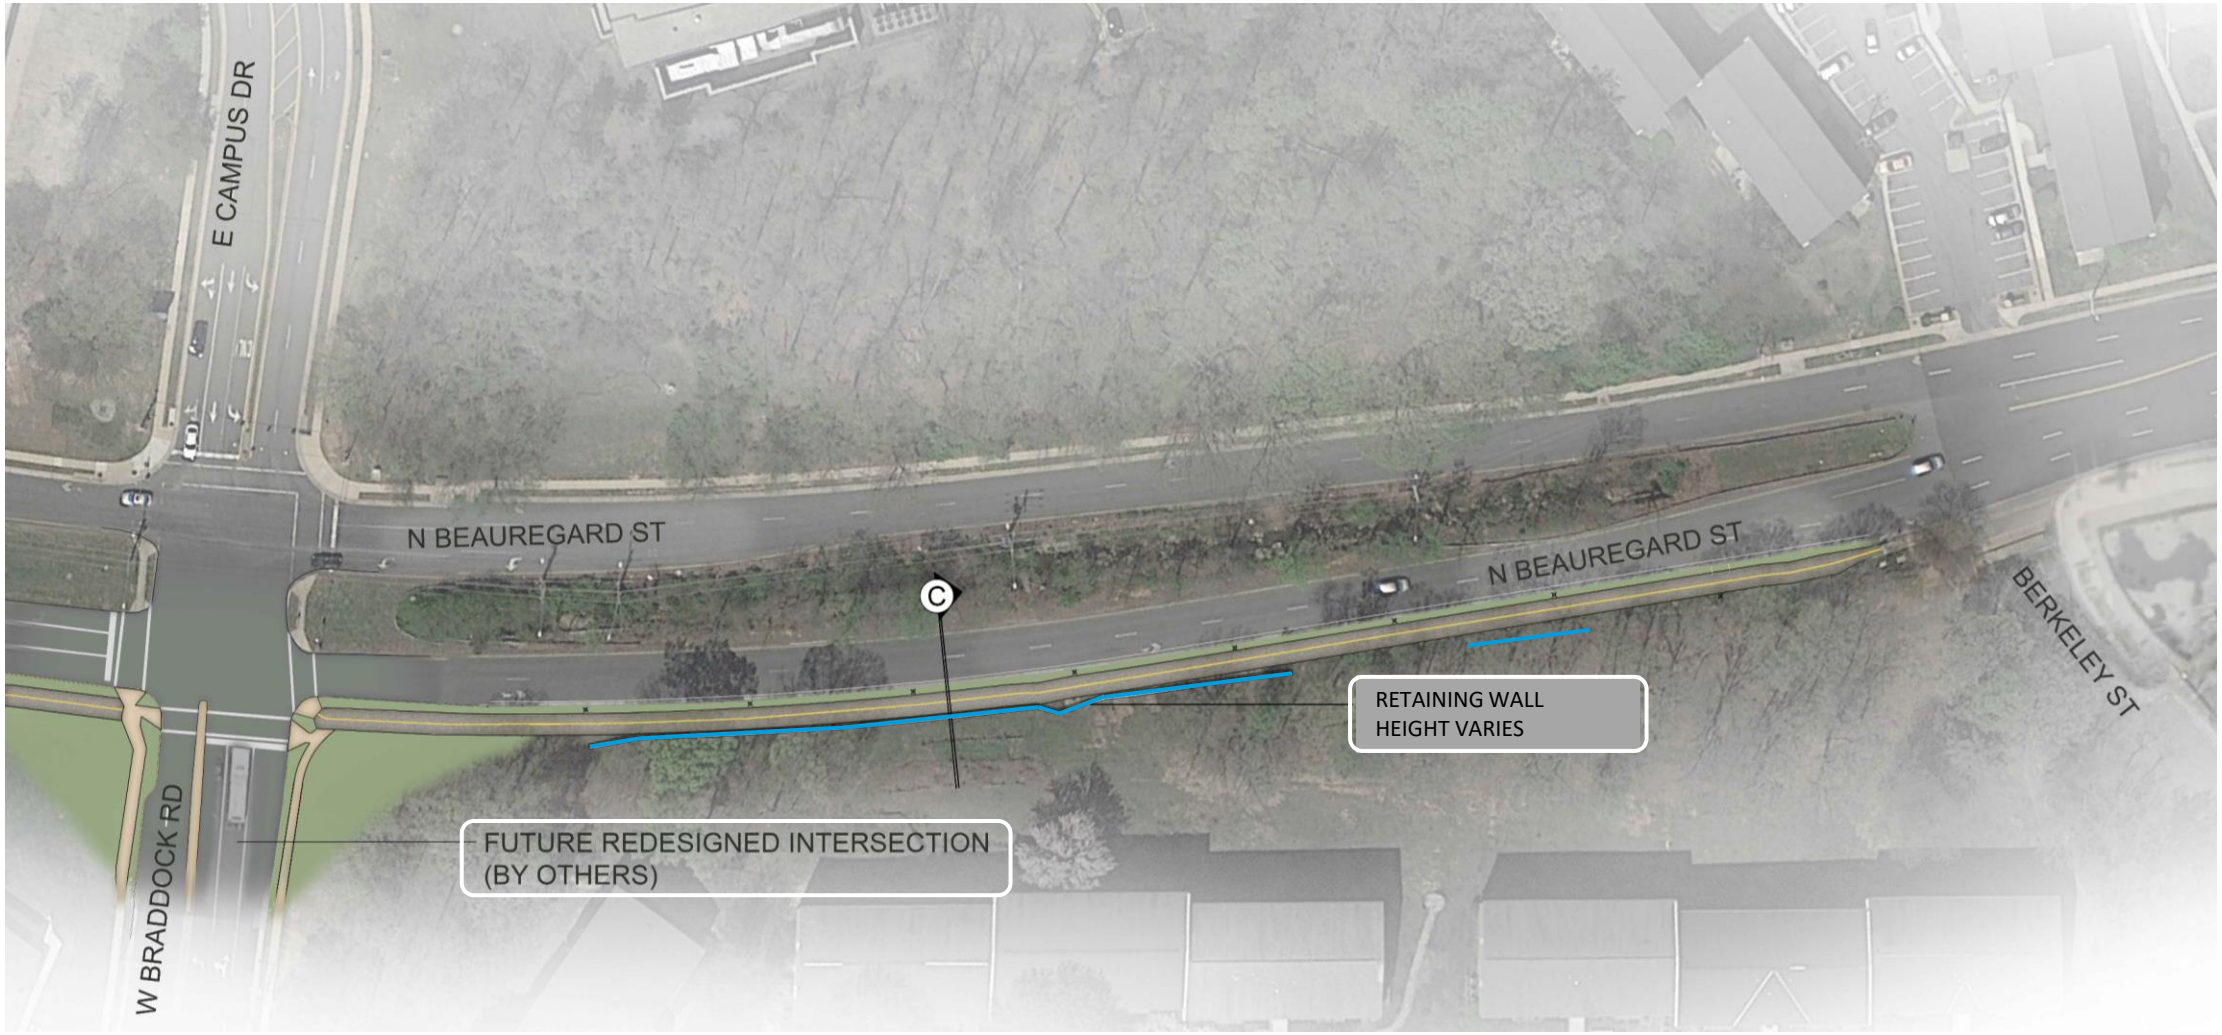


Typical Section: W Braddock Rd to Berkeley St

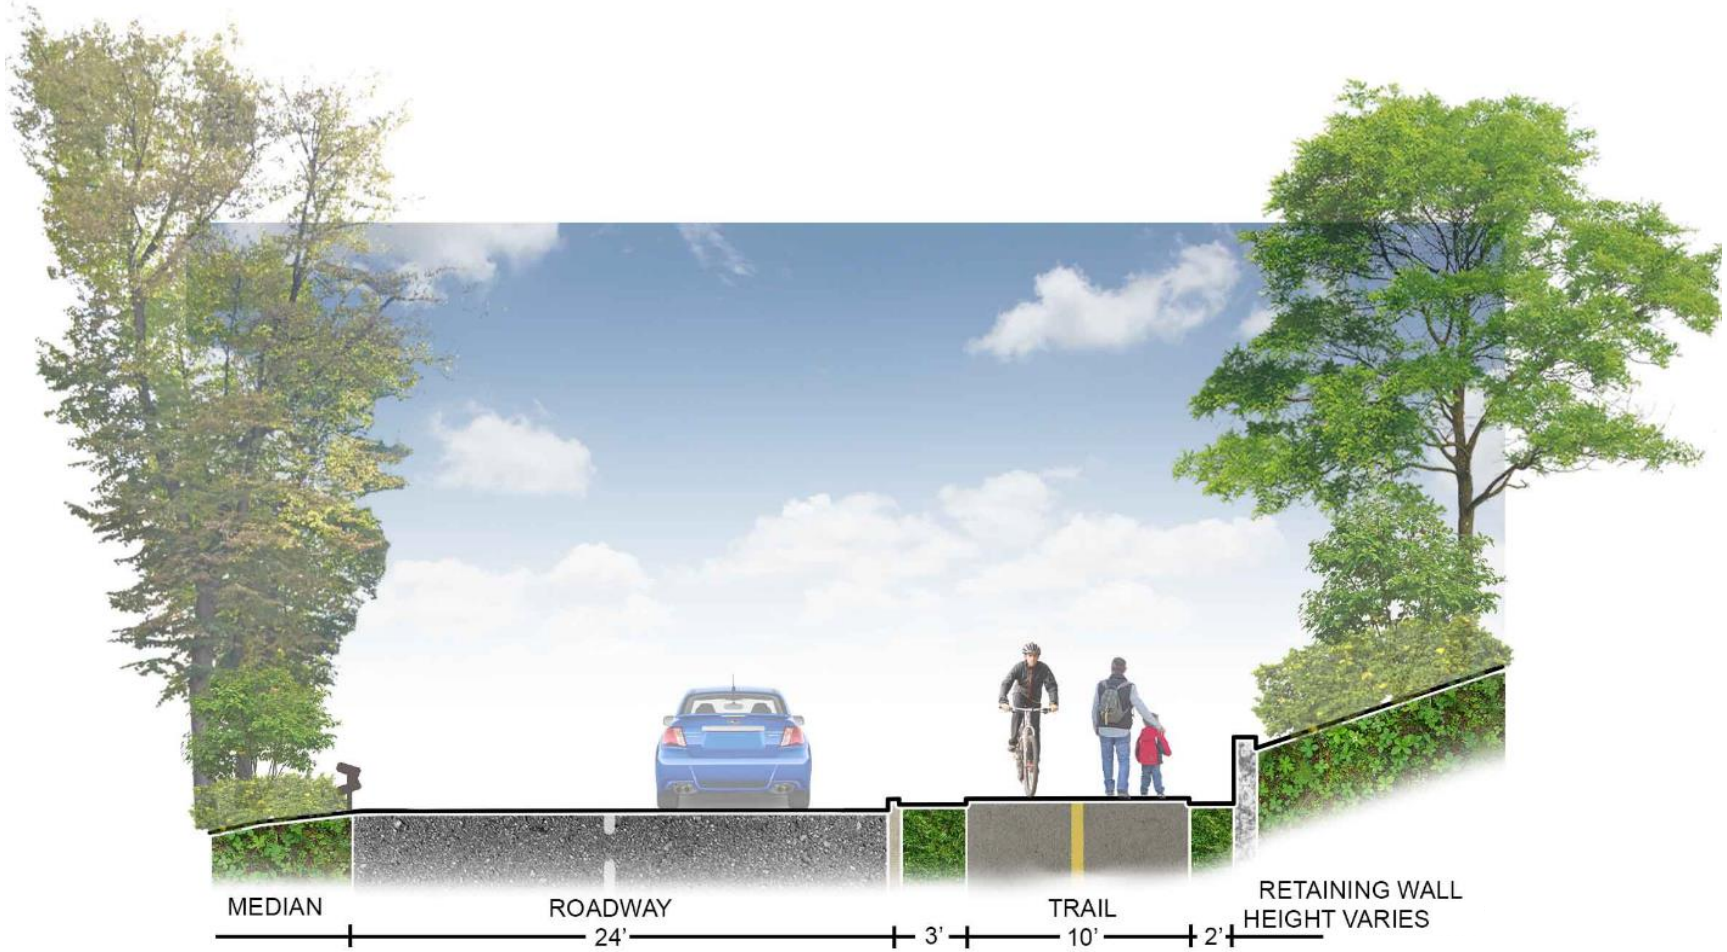

SECTION C

Construction Impacts

- Expected closures
  - No planned lane closures
  - Sidewalk closures (24 hours)
  - Pedestrian detours (24 hours)
- Limited parking impacts
  - Parking restrictions along Fillmore Street (During construction hours)
  - No Parking signs will be installed 72 hours ahead of construction start
- DASH service impacts
- Coordination with adjacent construction underway

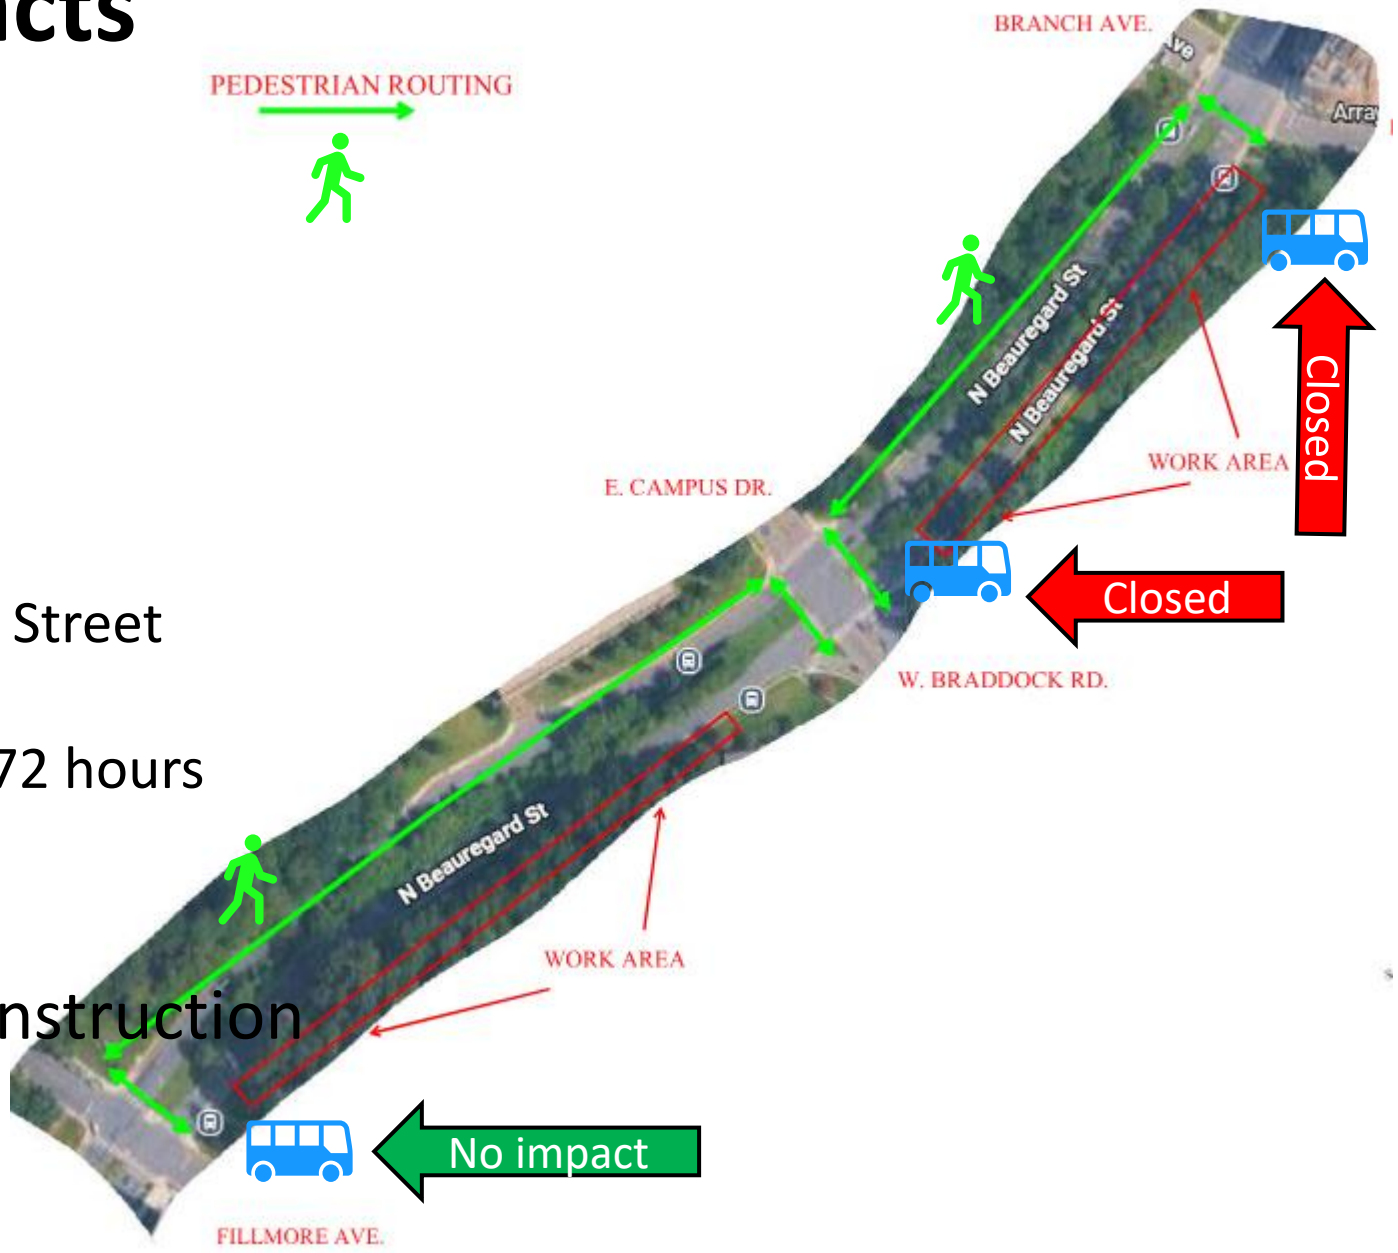

Project Schedule

Construction Duration:

- Early 2027 – Early 2028

Work Hours:

- Monday – Friday: 9 a.m. – 3:30 p.m.
- Saturday: 9 a.m. – 6 p.m. (as needed)



Closing Summary

Location: N Beauregard Street from Fillmore Avenue to Berkeley Street.

Purpose: Improve pedestrian and cyclist connectivity and safety.

Scope of Work: Widen the sidewalk from 4 feet to a multi-use trail of 10 feet with retaining walls, and lighting.

Duration: Early 2027 – Early 2028

Maintenance of Traffic: No lane closures, sidewalk and bus stop closure during construction.

Additional Information

City Project Manager

David Le

Transportation & Environmental Services – Project Implementation

703.746.4058

David.Le@AlexandriaVA.gov

City Construction Manager

Robert McGuire

Transportation & Environmental Services – Project Implementation

703.856.6600

Robert.McGuire@AlexandriaVA.gov

Contractor Emergency Contact

Kevin Krenzler, Superintendent

Milani Construction, LLC

240.338.8439

Kkrenzler@milaniconstruction.net

Project Webpage

alexandriava.gov/go/2831